

[illegible]

# AlphaCS-H20-MEA

## 1000V Liquid-Cooling System

## CAPACITY

Battery Module: 52.2 kWh

20ft. DC Coupling: 250 kW / Max. 1,175 kWh

20ft. AC Coupling: 250 kW & 500 kW / Max. 1,410 kWh



## All-in-One Design

## Easily Installation

## Seamless Switching (<20ms)

## Easily Set Function Parameters

## Intelligent liquid cooling temperature control

# AlphaCS-H20-MEA




Model	AlphaCS-H20-MEA-DC250	AlphaCS-H20-MEA-AC250/500
DC Parameters		
Nominal Capacity	Max. 1,175.6 kWh	Max. 1,410.7 kWh
Battery Cluster Connection	Max. 5 Clusters in Parallel	Max. 6 Clusters in Parallel
Rated Voltage	748.8 VDC	
Working Voltage Range	631.8 ~ 842.4 VDC	
Battery Chemistry	LFP (LiFePO <sub>4</sub> )	
Battery Cooling Type	Liquid Cooling	
AC Parameters		
Rated Charging and Discharging Power	250 kW	250 / 500 kW
HV DC bus voltage	LV voltage + 40 V ~ 900 V	/
LV PV input voltage	250 ~ 800 V	/
Max. PV Power	800 kW	/
AC Current	380 A	380 A / 760 A
AC Frequency	50 Hz / 60 Hz (±2.5 Hz)	
On-grid/off-grid switch time	<20 ms	
Rated Grid voltage	400 VAC (±15%)	
Physical Parameters		
Dimensions (W x D x H)	6,058 x 2,438 x 2,896 mm	
Ingress Protection	IP54	
Product Type	Outdoor (Container)	
Fire-Fighting System	Aerosol	
System Weight	21 t	23 t
Battery Parameters		
Battery Model	M166314-52S-EX	
Rated Voltage	166.4 V	
Nominal Capacity	52.2 kWh	
Rated Charging and Discharging Power	26.1 kW (0.5 P)	
Ingress Protection	IP67	
Weight	340 kg	
Dimensions (W x D x H)	810 x 1,125.5 x 237.5 mm	
Operating Temperature Range	-30 °C ~ 50 °C*	
Certification		
Safety	UN38.3,UN3536, IEC 62619, IEC 62477, IEC 61000, UL9540A	

\*The optimum temperature range is 15~35°C. If the ambient temperature is too high or too low, the battery performance may deteriorate.


# AlphaCS-H20-MEA

## TOPOLOGY DIAGRAM


### DC-Coupling Solution

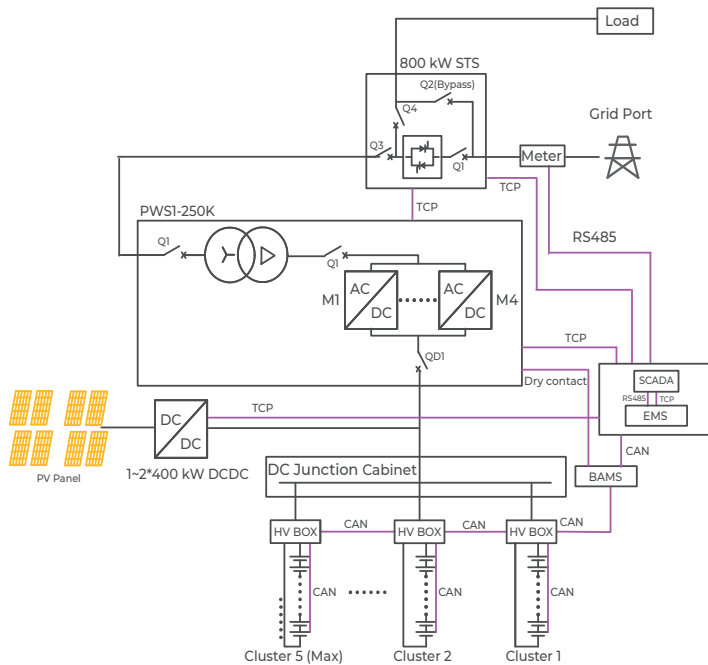

### AC-Coupling Solution

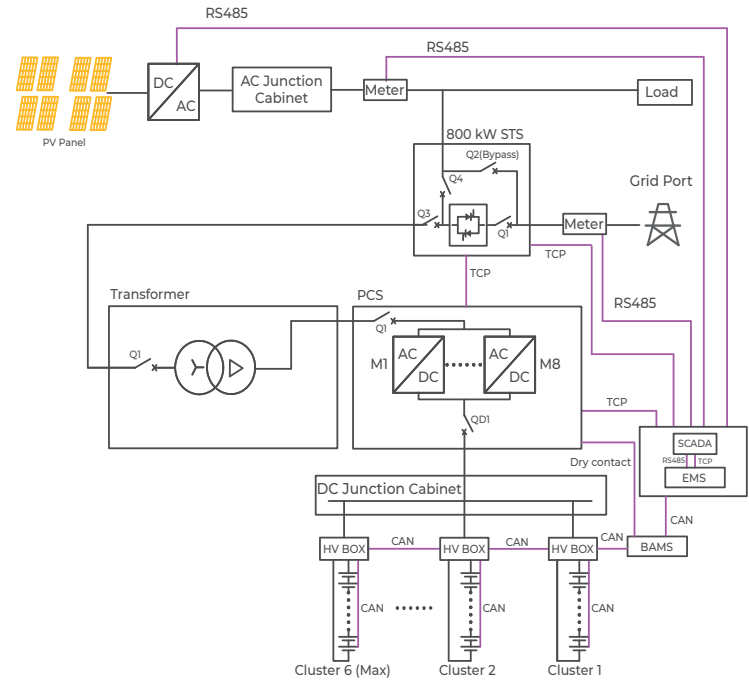


### DC-Coupling

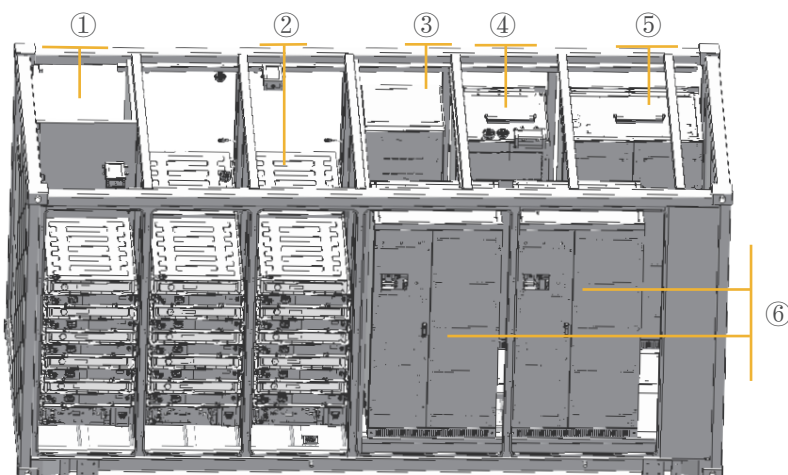

- ①: Liquid cooling unit
- ②: Battery Cluster
- ③: DC junction Cabinet
- ④: STS

### AC-Coupling

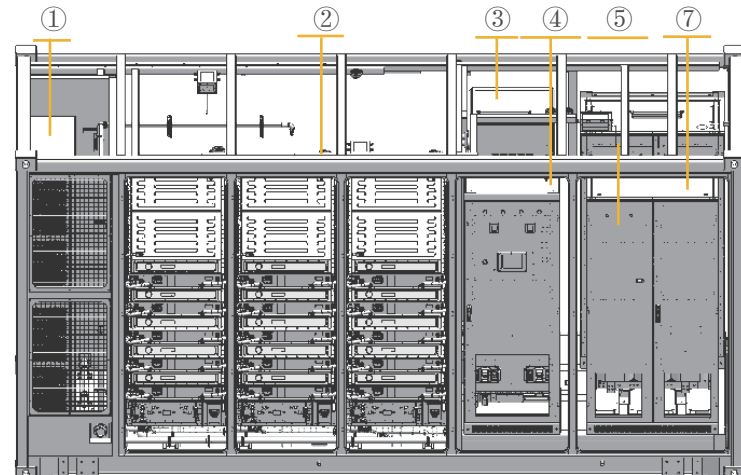

- ⑤: PCS
- ⑥: DCDC
- ⑦: Transformer

# Equipment Parameter

PCS		
Model	PWS1-250KTL-CN	PWS1-500KTL-CN
Battery Voltage Range	600 ~ 900 V	600 ~ 900 V
Max. Charging / Discharging Current	440 ADC	873 ADC
Nominal Power	250 kW	500 kW
Rated Voltage	400 V	400 V
Grid Voltage Range	380/400 (-15%~15%) VAC, 3L / N / PE	340 ~ 460 V, 3L / N / PE
Power Factor Range	0.99 / -1 ~ 1	0.99 / -1 ~ 1
Rated Output Frequency	50/60(-2.5~2.5) Hz	50 / 60 Hz
Dimensions (W×D×H)	1,200 x 2,160 x 800 mm	1,100 x 800 x 2,160 mm
Rated AC Current	380 A	760 A
Transformer		
Model	PWT-500K	
Rated Capacity	500 kVA	
Input Voltage	380 V	
Output Voltage	400 V	
Group of Connections	Dyn11	
Insulation Class	H	
No-Load Current	5%	
Full-Load Efficiency	≥99.17%	
Ambient Temperature	-25 ~ 50°C	
Weight	1,580 kg	
Dimension (W×H×L)	1,100 x 800 x 2,160 mm	
STS		
Model	PWD_800K	
Rated Capacity	800 kW	
Rated Voltage	400 V	
Input Voltage Range	-15% ~ 15%	
Output Voltage Range	-15% ~ 15%	
Nominal Current	1154 A	
AC Frequency	50Hz / 60 Hz ± 2.5 Hz	
Switching Time Gap	≤20 ms	
Ingress Protection	IP20	
Wiring Mode	Three Phase, 4 Wires	
Max. Efficiency	99.5% (Full Load)	
Cooling Method	Forced Air Cooling	
Dimensions (W×H×L)	800 x 800 x 2,160 mm	
Weight	450 kg	

# Equipment Parameter

DCDC	
Model	PDS1_400K
HV DC Bus Voltage	LV voltage + 40 V ~ 900 V
HV DC Bus Current	0~130 A ×8
LV PV Input Voltage/Battery Voltage	250 ~ 800 V
LV PV Input Current/Battery Current	0~130 A ×8
Power Rating	50 kW ×8
Ingress Protection	IP20
Weight	Cabinet 280 kg + Module 40kg*n (n=1,2,...,8)
Dimension (W×H×L)	1,100 x 2,160 x 800 mm
Altitude	3,000 m
PV Inverter (Adjust for specific projects)	
Model	SG125CX-P2
Recommended max. PV input power	175 kW
Max. PV input voltage	1,100 V
Rated PV input voltage	600 V
MPPT voltage range	180 V – 1,000 V
Max. PV input current	360 A ( 30 A * 12 )
Rated AC output power	125 kW
Max. AC output current	181.1 A
Rated AC voltage	3 / N / PE, 400 V
AC voltage range	320 V – 480 V
Rated grid frequency	50 Hz / 60 Hz
Cooling method	Smart forced air cooling
Ingress Protection	IP66
Weight	89.5 kg
Dimension (W×H×D)	1,020 x 795 x 360 mm

# "BIGGER & STRONGER"

## Commercial & Industrial Solution Supports Your Business

---

AlphaESS is a world-leading energy storage solution and service provider covering the full power range.

 @AlphaEnergyStorageSystem  @AlphaESS  @alpha\_ess  @AlphaESS  [www.alphaess.com](http://www.alphaess.com)

### Alpha ESS Co., Ltd.

Tel: +86 513 8060 6891  
Email: [info@alpha-ess.com](mailto:info@alpha-ess.com)  
Website: [www.alphaess.com](http://www.alphaess.com)  
Add: No. 1086 Bihua Road, Tongzhou District,  
Nantong City, Jiangsu Province, China

### Alpha ESS International Pte. Ltd.

Tel: +65 6513 1125 / +65 6513 1126  
Email: [Singapore@alpha-ess.com](mailto:Singapore@alpha-ess.com)  
Add: 2 Corporation Road #01-06A Corporation Place  
618494 Singapore

### Alpha ESS Australia Pty. Ltd.

Tel: +61 02 9000 7676  
Email: [techsupport@alphaess.au](mailto:techsupport@alphaess.au)  
Website: [www.alphaess.au](http://www.alphaess.au)  
Add: 8/15-21 Gibbes Street, Chatswood,  
NSW 2067 Australia

### Alpha ESS Europe GmbH

Tel: +49 6196 7863 485  
Email: [europe@alpha-ess.de](mailto:europe@alpha-ess.de)  
Website: [www.alphaess.de](http://www.alphaess.de)  
Add: Alfred-Herrhausen-Allee 3-5, 65760 Eschborn,  
Germany

### Alpha ESS UK Ltd.

Tel: +44 330 043 2610  
Email: [info@alpha-ess.com](mailto:info@alpha-ess.com)  
Add: Drake house, Long street, Dursley, gl11 4hh UK

### Alpha ESS Italy S.r.l.

Tel: +39 339 462 4288  
Email: [info@alpha-ess.it](mailto:info@alpha-ess.it)  
Add: Via Del Molinuzzo 83, 59100 Prato (PO), Italy

### Alpha ESS USA, Inc.

Tel: +1 408 368 7828  
Email: [inquiry@alphaess.us](mailto:inquiry@alphaess.us)  
Add: Unit 5 2180 S Ivanhoe St, Denver, CO 80222 USA

### Alpha ESS Korea Co., Ltd.

Email: [info@alpha-ess.com](mailto:info@alpha-ess.com)  
Add: 2F, 19-4, Nohyeong 11-gil, Jeju-si, Jeju-do,  
Republic of Korea